



FBLG

Customized air-cooled radiators

General information & application


Air cooled radiators FBLG have been designed for heavy industrial cooling applications for cooling of various process liquids, even in the most extreme conditions. Dual coil models are available for simultaneous cooling of LT/HT engine circuits. Applications include:

- diesel and gas engine cooling
- turbine cooling
- oil cooling
- various processes (transformers, air compressors, etc.)

Liquids	all liquids that do not corrode copper
Capacities	customer specification

Standard configuration

- FBLG* ranges
 - FBLGS = standard unit width (2.6 m)
 - FBLGC = container unit width (2.3 m)
 - FBLGE = custom coil width
 - FBLGA = special coil configuration
 - FBLGY = stainless steel tubing
- Finned coil
 - Copper or stainless steel tubes (FBLGY)
 - corrugated Al-fins 0.18 mm, no turbulators
 - fin spacing 2.3 to 4 mm
- Direct driven axial fans, suitable for use with frequency converters. *When designing a frequency converter system, the general guidelines for allowed cable lengths, sinus filters, dU/dT filters etc. have to be considered.*
- Fan motors available for various power supplies. The motors are squirrel-cage motors for outdoor use built to IEC standards and provided with condensing water outlets and shaft seals together with H-class insulation. Protection class for motors is IP55, except for the condensing water outlets. The motors are prewired to lockable safety switches.
- Fan diameters 1.2 or 2 meter.
- All casing parts are of hot dip galvanized steel plates and/or Aluzinc.
- Specifically designed for multiple installations with several radiators installed side by side.
- Fitted with header tube protection panels.

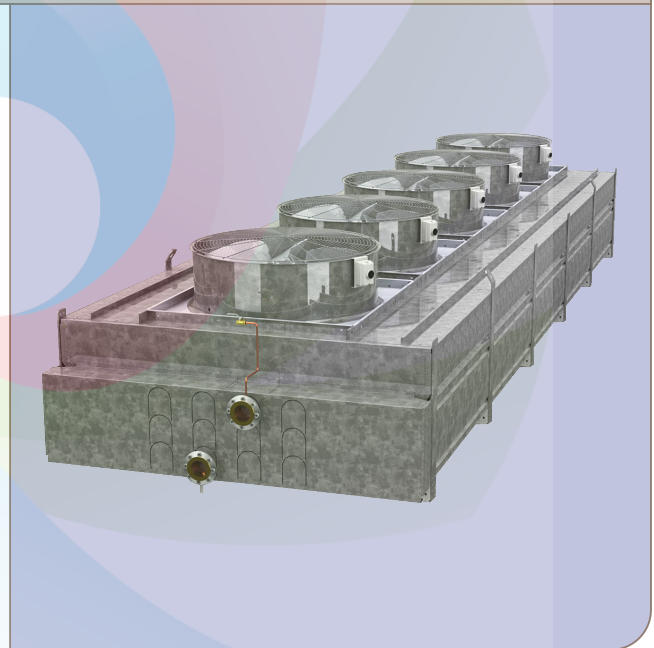

FBLG

- Manual venting and draining valves.
- Partitions between fans for regulation of the cooler capacity by means of separate use of the fans.
- Transportation either in wooden seaworthy packing or standard 40'/45' container. Also suitable for truck transportation.

Certifications

The Alfa Laval quality system is in accordance with ISO 9001. All products are manufactured according to CE and PED regulations.

Design pressure

Design pressure 6 barg. Each heat exchanger is leak tested with dry air at 9 barg. Higher design pressures on request.

Documentation

For FBLG radiators extensive product & project documentation can be supplied (standard in English).

- Mechanical & electrical configuration
- Quality, test & material certificates
- Project reports & documentation
- Installation, operation & maintenance manuals

Options

- Coil corrosion protection
 - epoxy coated aluminium fins (Ep)
 - copper fins (Cu)
 - sea water resistant aluminium fins (AlMg)
 - F-coating, FBGLA only (FC)
 - Blygold coating, FBGLA only (Bg)
- Dual coil models with LT- and HT-circuits
- Higher design pressures
- Mounting legs (up to 6m)
- Handrails and ladder for radiator group
- Flexible connection joints
- Epoxy painted casing (RAL colours)
- Fan speed control
 - step control (SC)
 - frequency control (SVC)
- Common terminal box located in the end of radiator
- Motor protective switch panel
- Special fan motors (EX-classed, NEMA etc.)
- Motors equipped with
 - anti-condensation heaters
 - klixon
 - PTC thermistors
 - vibration sensor

Benefits

- Factory tested plug & play units, easily connectable.
- Short assembly time on site.
- Heavy duty coil & casing materials.
- The close tube spacing and the specially corrugated fins make the heat transfer section extremely efficient.
- Plain profile fins without turbulators make the coil less prone to fouling and easier to clean.
- Motors built to IEC standards facilitate spare part service all over the world.
- Robust construction, no service platform required.
- Energy efficient - low total cost of ownership.
- One full year product guarantee.
- Over 20 years experience from more than 1000 projects.

Selection

FBLG radiators are always selected and customized on customer request. Please contact Alfa Laval for selections.



Code description

FBLG C - 1200 - 12 - 6A8 - 128 DN100 S4 + 96 DN80 S2 - Ep3

- Coil code (coil configuration+coating+fin spacing)
- HT coil size
- HT connections (S=same end, D=different ends, A=all at one end)
- HT connection size
- No. of HT circuits
- LT coil size
- LT connections (S=same end, D=different ends, A=all at one end)
- LT connection size
- No. of LT circuits
- No. of motor poles
- Power supply (A=3/400V/50Hz, B=3/460V/60Hz, C=3/380V/30Hz, D=other)
- No. of fans
- Fan diameter (12=1240 mm, 20=2000 mm)
- Coil length
- Range (S=standard coil width 2520 mm, C=container coil width 2240 mm, E=custom coil width, A=special coil configuration 2240 mm, Y=stainless steel tubing 2240 mm)
- Customized Fincoil radiator

EMD00193EN 1212

Alfa Laval reserves the right to change specification without prior notification.

How to contact Alfa Laval

Up-to-date Alfa Laval contact details for all countries are always available on our website at www.alfalaval.com

